


Takeuchi Mfg. (U.S.), Ltd. 519 Bonnie Valentine Way

Pendergrass, GA 30567 Phone: 706-693-3600

Fax: 706-693-3700

DISTRIBUTOR:


DIMENSIONS/TB10S

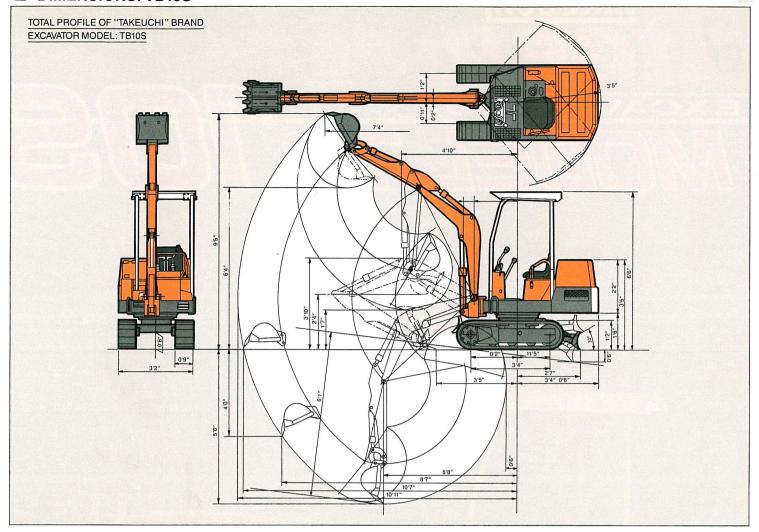

SPECIFICATIONS "TAKEUCHI" BRAND, DIESEL DRIVE HYDRAULIC EXCAVATOR, MODEL: TB 10-S

DIMENSIONS & WEIGHT	OVERALL LENGTH		10'7"	PERFOR- MANCE (CONT.)	ROTATION DEGREE	360°
	OVERALL WIDTH		3'2"		GRADEABILITY	30°
	OVERALL HEIGHT		6'6"		TRACTION SPEED, m/hr	1.44
	MINIMUM GROUND CLEARANCE		8"		STANDARD BUCKET CAPACITY	.08yd ³
	DISTANCE BETWEEN DRIVE				STANDARD BUCKET WIDTH	15.7"
	CRAWLER	TUMBLER CENTER & FRONT	3′4″	ENGINE (DIESEL)	MODEL: YANMAR	3T721-TBS
		IDLER CENTER			TYPE: VERTICAL/WATER COOLED	3cyl
		PAD WIDTH	9"		H.P. (RATED)	12.5hp
		NO. OF PADS	30 x 2		RPM	2,000rpm
		GROUND CONTACT LENGTH	3'8"		FUEL TANK CAPACITY	5.54gal
	GROUND PRESSURE		2.98psi		ENGINE OIL CAPACITY	.79gal
	OPERATING WEIGHT		2,420lbs		FUEL CONSUMPTION	.81g/h
PERFORMANCE	MAXIMUM DIGGING DEPTH		5'6"	HYDRAULIC SYSTEM	HYDRAULIC PUMP	GEAR
	MAXIMUM DIGGING HEIGHT		9'5"		MAXIMUM PRESSURE	2,130psi
	MAXIMUM DIGGING RADIUS		10'9"		HYDRAULIC OIL FLOW	4.22g/m x 2
	MAXIMUM DIGGING DEPTH USING BLADE AS AN OUTRIGGER		6′		BLADE PUMP FLOW	1.58g/m
					HYDRAULIC TANK CAPACITY	11.88gal
	MAXIMUM DIGGING DEPTH (VERTICAL)		N/A	_		
	MAXIMUM DUMPING HEIGHT		6'3"	BUCKET	STANDARD BUCKET	.08yd ³
	MAXIMUM DIGGING POWER (BUCKET)		2,200lbs		OPTIONAL BUCKETS	10" to 24"
	MAXIMUN	MAXIMUM DIGGING POWER (ARM)				

In accordance with our established policy of constant improvement, we reserve the right to amend these specifications at any time without notice.

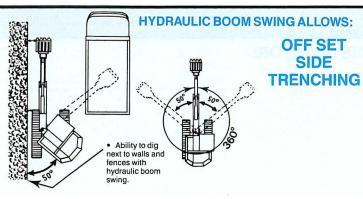

TAKEUCHI TIGER EXCAVATORS FEATURE:

- 360° turntable swing
- Independent boom swing, (except TB-2200D)
- Dozer Blade
- · Operator comfort and visability
- Fuel efficiency
- Low overall maintenance
- Ability to work in tight access areas
- Most models transportable behind pickup trucks
- Backed by quality dealers
- Built by the largest compact excavator manufacturer in the world
- Affordable prices!