


Takeuchi Mfg. (U.S.), Ltd. 519 Bonnie Valentine Way Pendergrass, GA 30567

Phone: 706-693-3600 / Fax: 706-693-3725

DISTRIBUTOR:


DIMENSIONS/TB35S

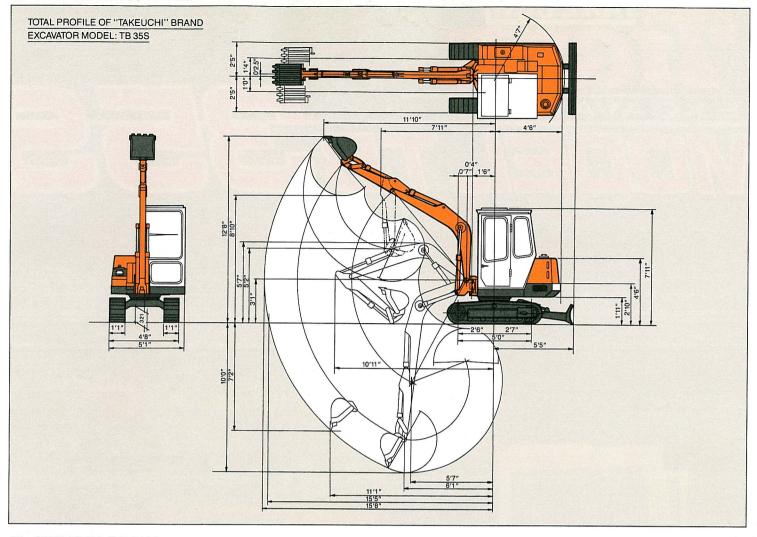

SPECIFICATIONS "TAKEUCHI" BRAND, DIESEL DRIVE HYDRAULIC EXCAVATOR, MODEL: TB 35-S

DIMENSIONS & WEIGHT	OVERALL LENGTH		15'4"	PERFOR- MANCE (CONT.)	ROTATION DEGREE	360°
	OVERALL WIDTH		5′1″		GRADEABILITY	30°
	OVERALL HEIGHT		7′9″		TRACTION SPEED, m/hr	2 Hi/1 Lo
	MINIMUM GROUND CLEARANCE		12.6"		STANDARD BUCKET CAPACITY	.16yd ³
	DISTANCE BETWEEN DRIVE				STANDARD BUCKET WIDTH	17.7"
	CRAWLER	TUMBLER CENTER & FRONT	5′		MODEL: YANMAR	3Т8ННЦТВ
		IDLER CENTER			TYPE: VERTICAL/WATER COOLED	3cyl
		PAD WIDTH	12.6"	ENGINE (DIESEL)	H.P. (RATED)	26
		NO. OF PADS	41 x 2		RPM	2,400rpm
		GROUND CONTACT LENGTH	5'		FUEL TANK CAPACITY	10.8gal
	GROUND PRESSURE		3.99psi		ENGINE OIL CAPACITY	1.2gal
	OPERATING WEIGHT		7,282 lbs		FUEL CONSUMPTION	1.6g/hr
PERFORMANCE	MAXIMUM DIGGING DEPTH		10'1"	HYDRAULIC SYSTEM	HYDRAULIC PUMP	GEAR
	MAXIMUM DIGGING HEIGHT		12'8"		MAXIMUM PRESSURE	2,343psi
	MAXIMUM DIGGING RADIUS		15'3"		HYDRAULIC OIL FLOW	6.71gpm x 2
	MAXIMUM DIGGING DEPTH USING BLADE AS AN OUTRIGGER		10'6"		BLADE PUMP FLOW	4.4gpm
				N IX	HYDRAULIC TANK CAPACITY	24.3gal
	MAXIMUM DIGGING DEPTH (VERTICAL)		7'3"		The second of th	
	MAXIMUM DUMPING HEIGHT		8'7"	BUCKET	STANDARD BUCKET	.16yd ³
	MAXIMUM DIGGING POWER (BUCKET)		3,977lbs		OPTIONAL BUCKETS	12" to 36"
	MAXIMUM DIGGING POWER (ARM)		2,926lbs			

In accordance with our established policy of constant improvement, we reserve the right to amend these specifications at any time without notice.

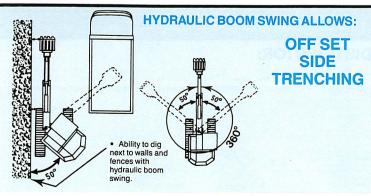

TAKEUCHI TIGER EXCAVATORS FEATURE:

- 360° turntable swing
- Independent boom swing, (except TB-2200D)
- Dozer Blade
- Operator comfort and visability
- Fuel efficiency
- Low overall maintenance
- Ability to work in tight access areas
- Most models transportable behind pickup trucks
- Backed by quality dealers
- Built by the largest compact excavator manufacturer in the world
- Affordable prices!